
CLOU COMPACT COOK

AUSTROFLAMM



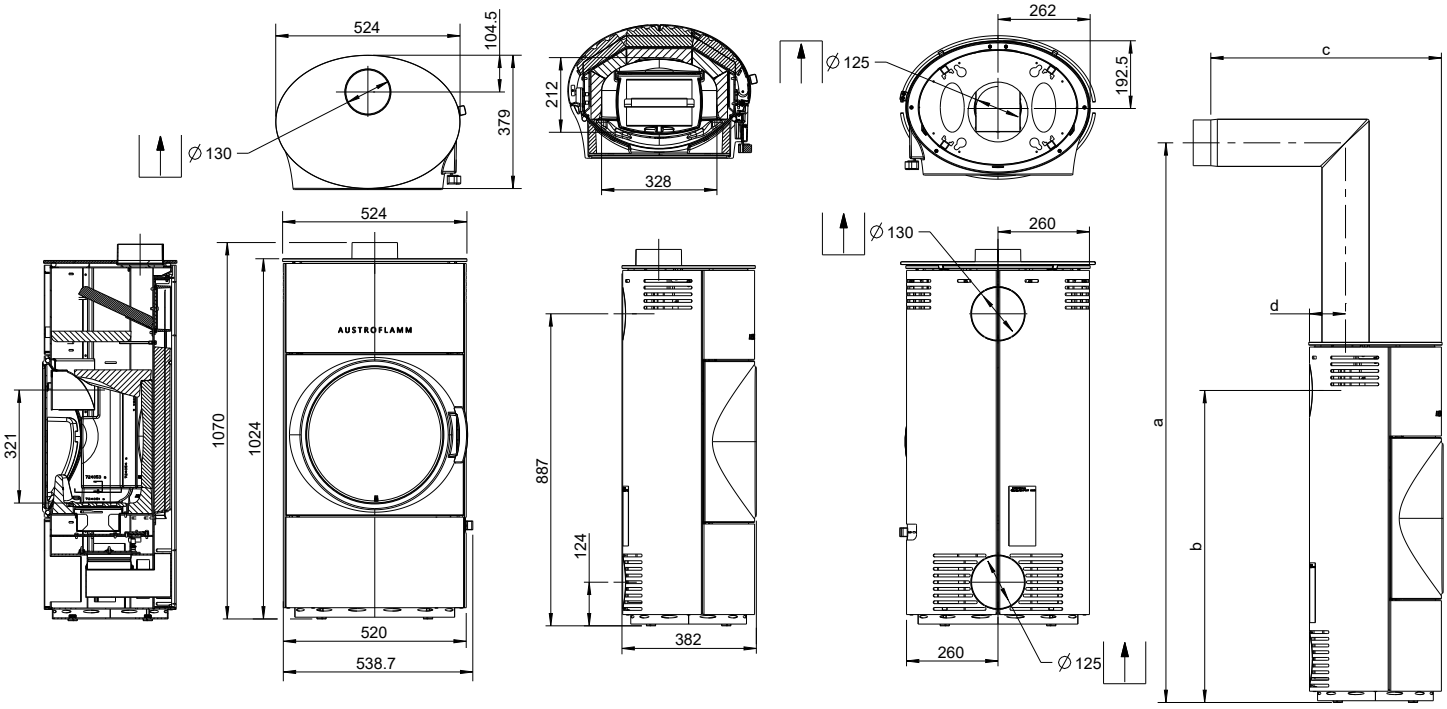

CLOU COMPACT COOK

AUSTROFLAMM

Dimensions and weight	
Height [mm]	1024
Width [mm]	520
Depth [mm]	375
Combustion chamber width [mm]	328
Combustion chamber height [mm]	321
Combustion chamber depth [mm]	212
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1601
Dimensions, b (with Austroflamm elbow piece) [mm]	887
Dimensions, c (with Austroflamm elbow piece) [mm]	656
Dimensions, d (with Austroflamm elbow piece) [mm]	105
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	112
Weight Xtra [kg]	-
Weight, HMS [kg]	37
Total weight inc. steel case (STM) [kg]	122
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	150
Minimum distance to combustible materials – left side dS_1 [mm]	150
Minimum distance to combustible materials – right side dS_2 [mm]	150
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1050
Minimum distance to combustible materials – floor in front dF [mm]	750
Minimum distance to combustible materials – bottom dB [mm]	0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	400
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	400
Minimum distance to combustible materials – distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50

Output	
Nominal heat efficiency [kW]	6.0
Minimum heat output [kW]	-
Maximum heat output [kW]	6.0
Minimum room heating capacity [m³]	65
Maximum room heating capacity [m³]	165
Energy efficiency class	A
Energy efficiency index (EEI)	103
Direct heat output [kW]	6.0
Indirect heat output [kW]	-
Efficiency at nominal heat output [%]	78
Efficiency at at part load heat output [%]	-

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	7.2
Flue gas temperature [°C]	299
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10

- not available

087001 05/08/2026
Technical and visual modifications, typographical and printer errors reserved

CLOU COMPACT COOK

AUSTROFLAMM

Equipment	
Xtra heat storage technology	-
Heat Memory System	Accessories
Type of fireplace	Type CA
Ash removal	Ash box

List of abbreviations/index

	Room air independent	**Door lock**
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

087001 05/08/2026
Technical and visual modifications, typographical and printer errors reserved