
ELISABETH

AUSTROFLAMM



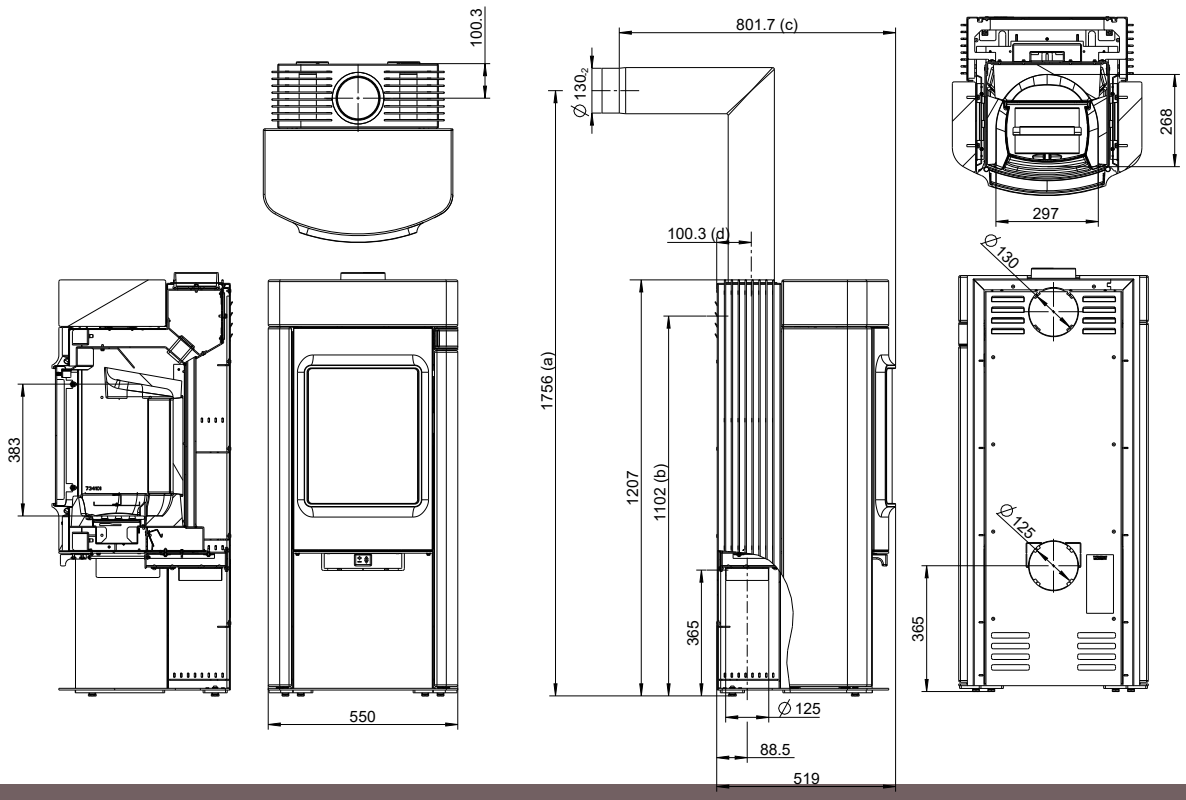

www.austroflamm.com

ELISABETH

AUSTROFLAMM

Dimensions and weight	
Height [mm]	1207
Width [mm]	550
Depth [mm]	519
Combustion chamber width [mm]	297
Combustion chamber height [mm]	383
Combustion chamber depth [mm]	268
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1756
Dimensions, b (with Austroflamm elbow piece) [mm]	1102
Dimensions, c (with Austroflamm elbow piece) [mm]	801.7
Dimensions, d (with Austroflamm elbow piece) [mm]	100.3
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	153
Weight Xtra [kg]	NPD
Weight, HMS [kg]	43
Total weight inc. steel case (STM) [kg]	220
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	295
Minimum distance to combustible materials - distance to rear dR [mm]	250/250
Minimum distance to combustible materials – left side dS_1 [mm]	250/ 250
Minimum distance to combustible materials – right side dS_2 [mm]	250/250
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1300/1300
Minimum distance to combustible materials – floor in front dF [mm]	0/0
Minimum distance to combustible materials – bottom dB [mm]	0/0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	600/600
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	600/600
Minimum distance to combustible materials – distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50

Output	
Nominal heat efficiency [kW]	7.0/ 7.2
Minimum heat output [kW]	NPD/NPD
Maximum heat output [kW]	7.0/ 7.2
Minimum room heating capacity [m³]	127/131
Maximum room heating capacity [m³]	200/206
Energy efficiency class	A+/A+
Energy efficiency index (EEI)	114/116
Direct heat output [kW]	7.0/ 7.2
Indirect heat output [kW]	NPD/NPD
Efficiency at nominal heat output [%]	86/86.9
Efficiency at at part load heat output [%]	NPD/NPD

Equipment	
Xtra heat storage technology	-
Heat Memory System	-
Type of fireplace	Type CA
Ash removal	Ash box

- not available

089001 01/07/2026
Technical and visual modifications, typographical and printer errors reserved

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	5.0/6.5
Flue gas temperature [°C]	299/ 200
Minimum delivery pressure at nominal heat output [Pa]	12/ 12
at 0.8 times nominal heat output [Pa]	10/10

List of abbreviations/index

	Room air independent	**Door lock**
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

089001 01/07/2026
Technical and visual modifications, typographical and printer errors reserved