
FLOK 2.0

AUSTROFLAMM



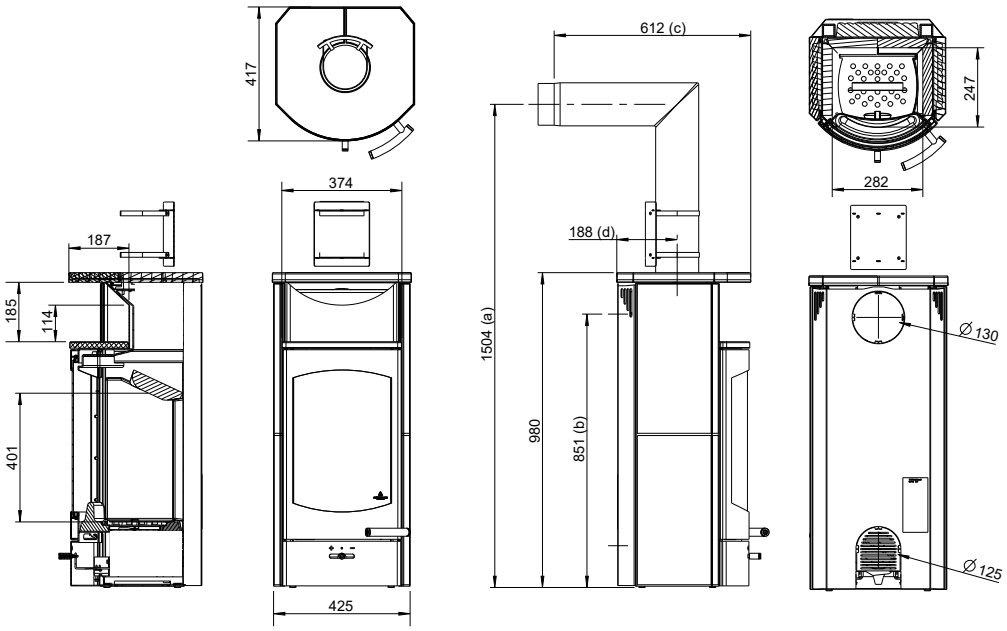

www.austroflamm.com

FLOK 2.0

AUSTROFLAMM

Dimensions and weight	
Height [mm]	980
Width [mm]	425
Depth [mm]	417
Combustion chamber width [mm]	282
Combustion chamber height [mm]	401
Combustion chamber depth [mm]	247
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	374
Warming compartment height [mm]	185
Warming drawer, depth [mm]	187
Dimensions, a (with Austroflamm elbow piece) [mm]	1504
Dimensions, b (with Austroflamm elbow piece) [mm]	851
Dimensions, c (with Austroflamm elbow piece) [mm]	612
Dimensions, d (with Austroflamm elbow piece) [mm]	188
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	78
Weight Xtra [kg]	NPD
Weight, HMS [kg]	53
Total weight inc. steel case (STM) [kg]	86
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	130
Minimum distance to combustible materials - distance to rear dR [mm]	270/ 70
Minimum distance to combustible materials – left side dS_1 [mm]	230/ 250
Minimum distance to combustible materials – right side dS_2 [mm]	230/ 250
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1000/ 1100
Minimum distance to combustible materials – floor in front dF [mm]	460/ 560
Minimum distance to combustible materials – bottom dB [mm]	0/0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	510/ 590
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	510/ 590
Minimum distance to combustible materials – distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50

The safety distances indicated in this table are to be understood as follows:
Value 1 = Standard version of the stove
Value 2 = Safety distances with optional heat shield

- not available

056006 14/10/2026
Technical and visual modifications, typographical and printer errors reserved

FLOK 2.0

AUSTROFLAMM

Output	
Nominal heat efficiency [kW]	4.0
Minimum heat output [kW]	NPD
Maximum heat output [kW]	4.0
Minimum room heating capacity [m³]	73
Maximum room heating capacity [m³]	114
Energy efficiency class	A+
Energy efficiency index (EEI)	107
Direct heat output [kW]	4.0
Indirect heat output [kW]	NPD
Efficiency at nominal heat output [%]	81
Efficiency at at part load heat output [%]	NPD

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	3.92
Flue gas temperature [°C]	343
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10

Equipment	
Xtra heat storage technology	-
Heat Memory System	Accessories
Type of fireplace	Type BE
Ash removal	Ash box

List of abbreviations/index

	Room air independent	**Door lock**
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

056006 14/10/2026
Technical and visual modifications, typographical and printer errors reserved