
KAMIBA 59 K2 L

AUSTROFLAMM



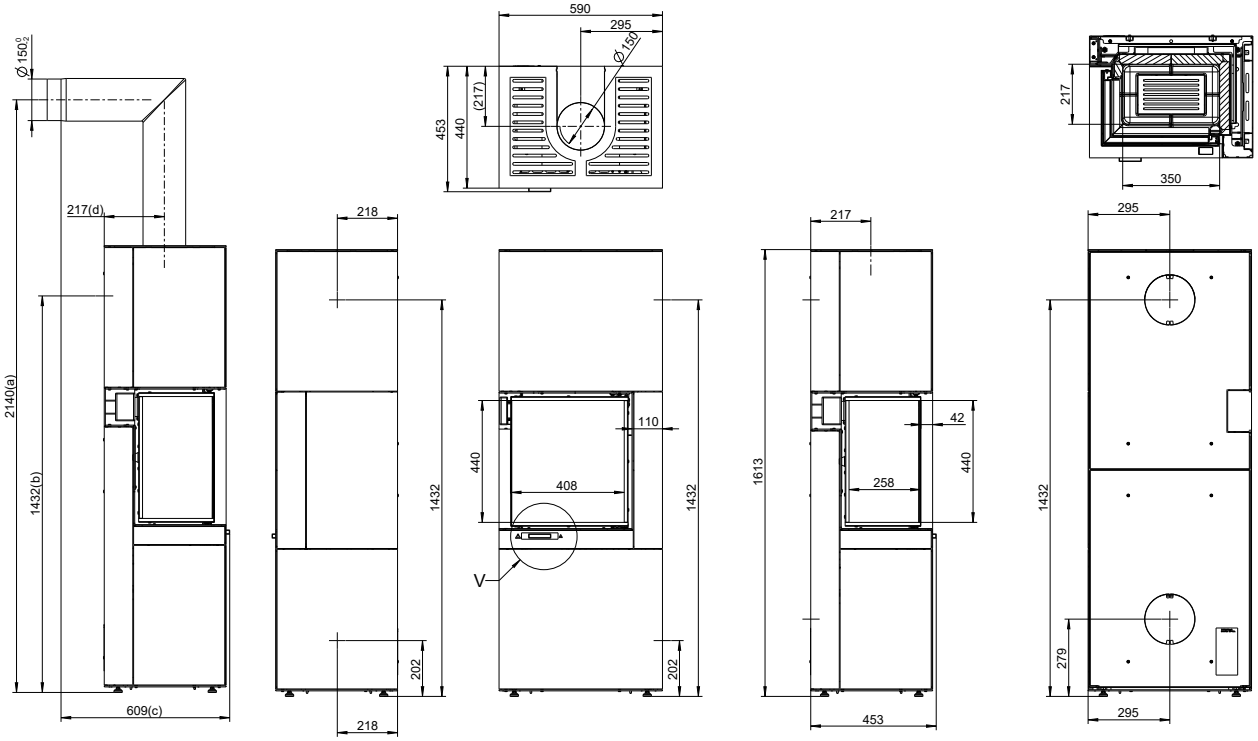

www.austroflamm.com

KAMIBA 59 K2 L

AUSTROFLAMM

Dimensions and weight	
Height [mm]	1623
Width [mm]	590
Depth [mm]	440
Combustion chamber width [mm]	350
Combustion chamber height [mm]	450
Combustion chamber depth [mm]	217
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	2150
Dimensions, b (with Austroflamm elbow piece) [mm]	1442
Dimensions, c (with Austroflamm elbow piece) [mm]	609
Dimensions, d (with Austroflamm elbow piece) [mm]	217
Flue pipe outlet, diameter [mm]	150
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	220
Weight Xtra [kg]	NPD
Weight, HMS [kg]	43
Total weight inc. steel case (STM) [kg]	247
Total weight inc. ceramic case (KGM) [kg]	275
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	150
Minimum distance to combustible materials – left side dS_1 [mm]	800
Minimum distance to combustible materials – right side dS_2 [mm]	180
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1100
Minimum distance to combustible materials – floor in front dF [mm]	0
Minimum distance to combustible materials – bottom dB [mm]	20
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	0
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	0
Minimum distance to combustible materials – distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50

Output	
Nominal heat efficiency [kW]	7.0
Minimum heat output [kW]	NPD
Maximum heat output [kW]	7.0
Minimum room heating capacity [m³]	127
Maximum room heating capacity [m³]	200
Energy efficiency class	A+
Energy efficiency index (EEI)	108
Direct heat output [kW]	7.0
Indirect heat output [kW]	NPD
Efficiency at nominal heat output [%]	82
Efficiency at at part load heat output [%]	NPD

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	8.0
Flue gas temperature [°C]	233
Minimum delivery pressure at nominal heat output [Pa]	13
at 0.8 times nominal heat output [Pa]	10

- not available

193001 09/09/2026
Technical and visual modifications, typographical and printer errors reserved

KAMIBA 59 K2 L

AUSTROFLAMM

Equipment	
Xtra heat storage technology	-
Heat Memory System	Accessories
Type of fireplace	Type CA
Ash removal	Ash box

List of abbreviations/index

	Room air independent	**Door lock**
Type CA	Yes	Mechanism for automatic door closing
Type CC	Yes	Manually closed and locked door, monitored by an alarm or closure control system
Type CM	Yes	Manually closed and locked door
Type BE	No	No special requirement

NPD - No performance determined

- not available

193001 09/09/2026
Technical and visual modifications, typographical and printer errors reserved