
LUCA COOK

AUSTROFLAMM



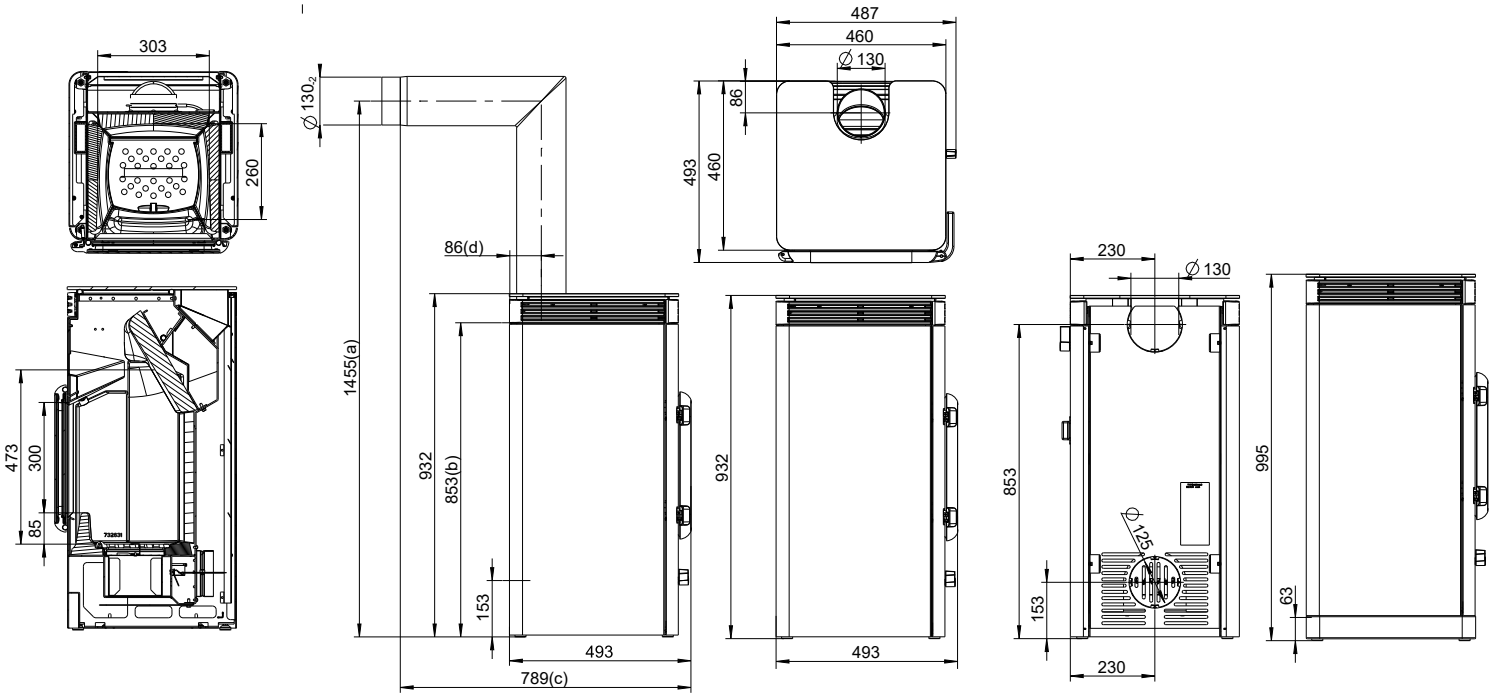

www.austroflamm.com

LUCA COOK

AUSTROFLAMM

Dimensions and weight	
Height [mm]	931
Width [mm]	487
Depth [mm]	493
Combustion chamber width [mm]	303
Combustion chamber height [mm]	473
Combustion chamber depth [mm]	260
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1454
Dimensions, b (with Austroflamm elbow piece) [mm]	852
Dimensions, c (with Austroflamm elbow piece) [mm]	789
Dimensions, d (with Austroflamm elbow piece) [mm]	86
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	135
Weight Xtra [kg]	NPD
Weight, HMS [kg]	NPD
Total weight inc. steel case (STM) [kg]	NPD
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	350/350
Minimum distance to combustible materials – left side dS_1 [mm]	300/300
Minimum distance to combustible materials – right side dS_2 [mm]	300/300
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1000/1000
Minimum distance to combustible materials – floor in front dF [mm]	0/0
Minimum distance to combustible materials – bottom dB [mm]	0/0
Minimum distance to combustible materials – left side radiation area dL_1 [mm]	350/350
Minimum distance to combustible materials – right side radiation area dL_2 [mm]	350/350
Minimum distance to combustible materials – distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50

Output	
Nominal heat efficiency [kW]	7.0/ 8.0
Minimum heat output [kW]	NPD/NPD
Maximum heat output [kW]	7.0/ 8.0
Minimum room heating capacity [m³]	127/ 145
Maximum room heating capacity [m³]	200/ 229
Energy efficiency class	A+/A+
Energy efficiency index (EEI)	107/ 116
Direct heat output [kW]	7.0/ 8.0
Indirect heat output [kW]	NPD/NPD
Efficiency at nominal heat output [%]	81/ 87
Efficiency at at part load heat output [%]	NPD/NPD

Equipment	
Xtra heat storage technology	-
Heat Memory System	-
External air connection / operation independent of ambient air	-
Ash removal	

- not available

085001 26/05/2026
Technical and visual modifications, typographical and printer errors reserved

Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	6.7/ 5.9
Flue gas temperature [°C]	292/ 214
Minimum delivery pressure at nominal heat output [Pa]	12/ 11
at 0.8 times nominal heat output [Pa]	10/10

- not available

085001 26/05/2026
Technical and visual modifications, typographical and printer errors reserved